


Excel Category 6 Cable U/UTP External Grade Fca PE 305m Box - Black

Item Code: 100-100

excel
without compromise.

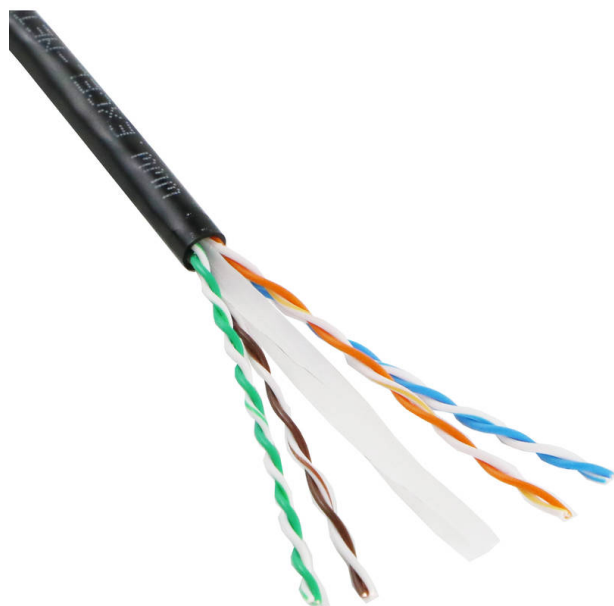

- ✕ Sequential metre markings
- ✕ UV and Moisture Resistant Polyethelene Outer Sheath
- ✕ Supports Gigabit Ethernet
- ✕ External duct grade
- ✕ Fast feed Reelex packaging
- ✕ Euroclass Fca

Product Overview

Excel Category 6 UTP cable is designed for optimal support of high-speed data protocols delivery 1Gbps performance to the workstation. The cable comes with a black polyethylene outer sheath, for outdoor use. Designed to be quick and easy to install the cable requires no specialist installation tools and is supplied in Reelex packaging for fast, snag free installation. To reduce wastage each cable is sequentially numbered, allowing quick and easy calculation of the cable remaining in the box.

The print legend on the cable now includes information regarding the DOP number, Test and Classification of the cable for traceability.

Product Specifications

Feature	Values
Category	6
Overall screening	None
Conductor screening	None
Outer sheath colour	Black
Reaction-to-fire class according to EN 13501-6	Fca
AWG-size	23
Specification core insulation	PE
Core identification	Colour
Outer sheath material	PE


Excel Category 6 Cable U/UTP External Grade Fca PE 305m Box - Black

Item Code: 100-100



Flame retardant	In accordance with EN 60332-1-2 and EN 50399
Outer diameter approx.	6.3 mm
Operating Temperature Range	-10...75 °C
NVP value	70 %
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Conductor surface	Bare

Cross-section diagram

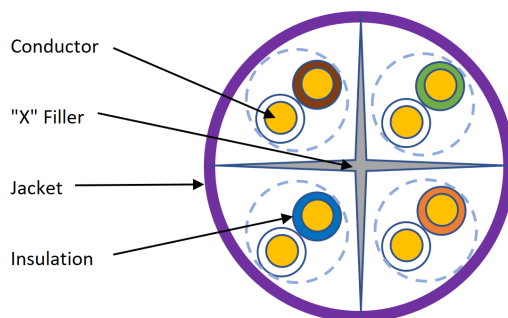

Cable specifications

Features	Values
Dielectric strength	2.5kV for 2s
Maximum Pulling Load	60N/6.1KgF
MBR during installation	8x cable OD
MBR installed	4x cable OD

Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2009+AMD1:2012 CSV	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2011	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
BS EN 50288-6-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2011	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A1:2013	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
RoHS	Restriction of Hazardous Substances - Compliant

Excel Category 6 Cable U/UTP External Grade Fca PE 305m Box - Black

Item Code: 100-100



Part Number Table

Part Number	Description
100-100	Excel Category 6 Cable U/UTP External Grade Fca PE 305m Box - Black

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.