Item Code: 202-034









- X Choice of port density
- X Available in ST, SC (duplex) and LC (quad)
- X Interchangeable adaptor plate
- X Hinged lockable doors
- X Individual locks
- X Cable management kit included

Product Overview

Excel patch boxes designed for high-density and secure terminations. Their two door design ensures that both the terminations and the patching are safe. The boxes have 20mm knockouts and pre-drilled fixing holes.

Product Specifications

| Feature | Values |
|---------------------------------|------------------------------------------------|
| Surface mounted | Wall Mount - 2 Door Lockable |
| Type of fastening | Screw |
| Type of connector | LC-Quad |
| With couplers | 12 Port Loaded |
| Suitable for number of couplers | 12 |
| Suitable for type of fibre | Multi mode |
| Separate strain relief kit | Cable Gland/Splice Bridge/Adhhesive cable ties |
| IP-rating | IP20 |
| Width | 362 mm |
| Height | 250 mm |
| Depth | 90 mm |

Item Code: 202-034



Additional specifications

| Features | Values |
|-----------------------------|-------------------|
| Operating Temprature | -25°C to +40°C |
| Cable Entry 20mm knock outs | 4 |
| Material | Cold rolled steel |
| Colour | White RAL 9002 |
| Material Thickness | 1.2mm |
| Material Coating | Powder Coating |

Included accessories

| Accessories | Quantity |
|---------------------------|----------|
| Cable Gland (PG 13.5) | 2 |
| Nylon cable tie | 10 |
| Adjustable cable tie | 6 |
| 24 Position splice holder | 1 |
| Mounting twist tie | 46 |
| Blanking plug | 4 |


Standards


| Applicable standard | Detail |
|----------------------|------------------------------------------------------------------------------------------------------------------------------|
| RoHS | Restriction of Hazardous Substances - Compliant |
| IEC 61754-1:2013 | Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces - Part 1: General and guidance |
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements |
| EN 50173-1:2011 | Information technology. Generic cabling systems - General requirements |

Item Code: 202-034



Product drawings

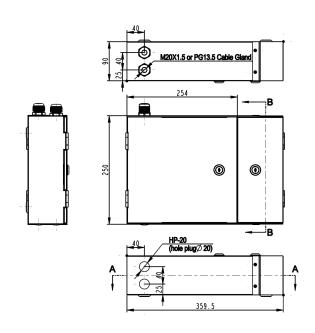

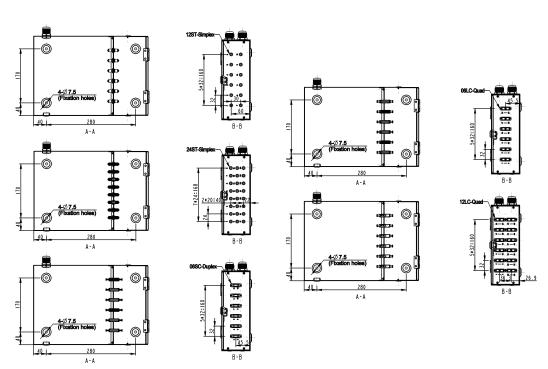

Item Code: 202-034



Part Number Table

| Part Number | Description |
|-------------|-------------------------------------------------------------------------------------|
| 202-033 | Enbeam 2 Door Lockable Wall Mounted Enclosure - 6 Port LC Quad 24-Core Multimode |
| 202-034 | Enbeam 2 Door Lockable Wall Mounted Enclosure - 12 Port LC Quad 48-Core Multimode |
| 202-035 | Enbeam 2 Door Lockable Wall Mounted Enclosure - 12 Port ST |
| 202-036 | Enbeam 2 Door Lockable Wall Mounted Enclosure - 24 Port ST |
| 202-037 | Enbeam 2 Door Lockable Wall Mounted Enclosure - 6 Port SC Duplex |
| 202-038 | Enbeam 2 Door Lockable Wall Mounted Enclosure - 12 Port SC Duplex 24-Core Multimode |

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.



Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.