

# Enbeam OS2 Singlemode 9/125 4 Core Fibre Optic Cable Tight Buffered Cca - Black

Item Code: 205-320

**excel**  
without compromise.



✕ Duct grade rodent resistant

✕ Sequentially metre marked

✕ Cut to length service

✕ 25 Year system warranty

✕ Euroclass Cca-s1a-d0-a1

## Product Overview

Excel OS2 9/125µm tight buffered optical fibre cables have been designed specifically for internal and external applications. The singlemode fibre is G.652.D compliant low water peak grade and offers OS2 performance and OS1 backwards compatibility. These compact, lightweight cables are extremely flexible and are quick and easy to install.

The cables are constructed around swellable reinforced yarns as common strength members containing up to 24 colour coded 250µm tight buffered fibres, covered with a flame retardant, low smoke zero halogen, outer sheath.

The print legend on the cable now includes information regarding the DOP number, Test and Classification of the cable for traceability.

## Product Specifications

Feature	Values
Number of Cores	4
Type of tube	Tight
Fibre type	Single mode 9/125
Category	OS2
Rodent resistant	Yes
Outer sheath material	Copolymer
Outer sheath colour	Black
Reaction-to-fire class according to EN 13501-6	Cca
Smoke development class according to EN 13501-6	s1a
Euro class flaming droplets/particles according to EN 13501-6	d0


# Enbeam OS2 Singlemode 9/125 4 Core Fibre Optic Cable Tight Buffered Cca - Black

Item Code: 205-320




Euro class acidity according to EN 13501-6	a1
Halogen free (acc. EN 60754-1/2)	Yes
Flame retardant	In accordance with EN 50399
Low smoke (acc. BS EN 61034-2)	Yes
Outer diameter approx.	6.5 mm

## Cross-section diagram

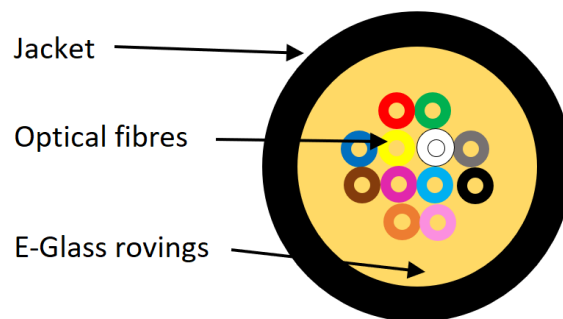

## Colour coding (as per TIA-598-C)

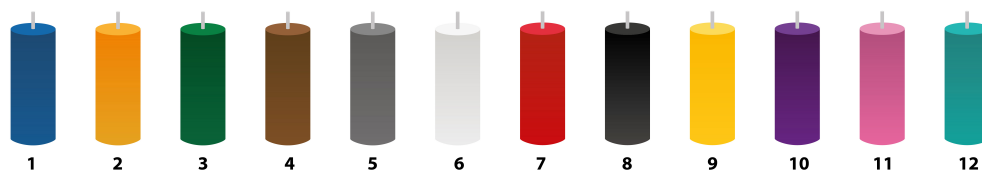

For fibre core counts above 12 the colour sequence is repeated with the addition of a mark every 70mm for cores 13-24 and two marks for 25-36 and so on.

## Cable specifications

Features		Values
Tight Buffered Fiber	Material	LSZH
	Diameter	0.85±0.05mm
Strength Member	Material	E-glass Yarns
Sheath	Material	LSZH

# Enbeam OS2 Singlemode 9/125 4 Core Fibre Optic Cable Tight Buffered Cca - Black

Item Code: 205-320



	Thickness	Typical 1.1mm
Cable Diameter	Diameter ( $\pm 0.3\text{mm}$ )	Approx. 6.5mm(4 cores), 6.6mm(6 cores), 7.0mm(8 cores) 7.0mm(12 cores), 8.0mm(16 cores), 8.5mm(24 cores)
Cable Weight		Approx. 34kg/km(4 cores), 36kg/km (6 cores), 39kg/km (8 cores) 43kg/km (12 cores), 52kg/km (16 cores), 63kg/km (24 cores)
Tensile Strength	Installation	800N( $\leq 12$ cores), 1100N( $> 12$ cores)
	Working	400N( $\leq 12$ cores), 550N( $> 12$ cores)
Cable Impact		1J
Crush Resistance	Installation	1000N
	Working	300N
Torsion		Change of Attenuation $\leq 0.10\text{dB}$ (SM fiber) Change of Attenuation $\leq 0.30\text{dB}$ (MM fiber)
Temperature Range	Installation	-30°C to +60°C
	Working	-30°C to +60°C
	Storage	-40°C to +60°C
Bending Radius	Short term	20 x Diameter
	Long term	10 x Diameter

## Fibre specifications

Features	Values
Attenuation	@1310nm 0.39 dB/km(Maximum)
	@1550nm 0.25dB/km(Maximum)
	For any 1000 metre Max. 0.1dB/km
Reflex Index	@1310nm 1.467
	@1550nm 1.468
Cladding Diameter	125.0 $\pm$ 0.7 $\mu\text{m}$
Cladding Non-circularity	$\leq 1\%$
Core - Cladding Concentricity Error	$\leq 0.6\mu\text{m}$

# Enbeam OS2 Singlemode 9/125 4 Core Fibre Optic Cable Tight Buffered Cca - Black

Item Code: 205-320



Primary Coating Diameter		242±7µm
Primary Coating Non-circularity		≤5%
Primary Coating - Cladding Concentricity Error		≤12µm
Chromatic Dispersion Coefficient	In 1285-1330nm	≤3.4ps/km·nm
	@1550nm	≤18.0ps/km·nm
	@1625nm	≤22.0ps/km·nm
Zero Dispersion Wavelength, λ <sub>0</sub>		1300-1324nm
Zero Dispersion Slope		≤0.092 ps/(km·nm <sup>2</sup> )
Cut-off Wavelength, λ <sub>cc</sub>		≤1260nm
Mode Field Diameter	@1310nm	9.0±0.5µm
	@1550nm	10.4±0.5µm
Macro Bending Loss(100 turns)	25mm mandrel	≤0.05dB@1310nm&1550nm
	30mm mandrel	≤0.05dB@1625nm
PMD Coefficient, Max. Uncabled		≤0.5ps/√km
PMDQ Link Design Value		≤0.2ps/√km
Proof Stress Level		≥0.69 Gpa(≈1% strain)
Fibre Curl Radius		□4m
Stripe Force(peak)		1.3≤F <sub>peak.strip</sub> ≤8.9N
Dynamic Fatigue Resistance Aged and Unaged		≥20
Static Fatigue Resistance		≥23

## Standards

Applicable standard	Subject
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
IEC 60754-2:2011	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A1:2013	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements

# Enbeam OS2 Singlemode 9/125 4 Core Fibre Optic Cable Tight Buffered Cca - Black

Item Code: 205-320



IEC 60793-1-1:2017	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry
IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement
IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test
ITU G.652.D	Characteristics of a single-mode optical fibre and cable
EN 50173-1:2011	Information technology. Generic cabling systems - General requirements
EN 50575: 2014 + A1: 2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
ANSI/TIA 568-3.D	Optical Fiber Cabling and Components Standard
ANSI/TIA/EIA 598-D	Optical Fibre Cable Colour Coding
RoHS	Restriction of Hazardous Substances - Compliant

## Part Number Table

Part Number	Description
205-230	Enbeam OS2 Singlemode 9/125 6 Core Fibre Optic Cable Tight Buffered Cca - Black
205-320	Enbeam OS2 Singlemode 9/125 4 Core Fibre Optic Cable Tight Buffered Cca - Black
205-322	Enbeam OS2 Singlemode 9/125 8 Core Fibre Optic Cable Tight Buffered Cca - Black
205-324	Enbeam OS2 Singlemode 9/125 12 Core Fibre Optic Cable Tight Buffered Cca - Black
205-326	Enbeam OS2 Singlemode 9/125 16 Core Fibre Optic Cable Tight Buffered Cca - Black

# Enbeam OS2 Singlemode 9/125 4 Core Fibre Optic Cable Tight Buffered Cca - Black

Item Code: 205-320



205-328

Enbeam OS2 Singlemode 9/125 24 Core Fibre Optic Cable Tight Buffered Cca - Black

205-328-YW

Enbeam OS2 Singlemode 9/125 24 Core Fibre Optic Cable Tight Buffered Cca - Yellow

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at [sales@excel-networking.com](mailto:sales@excel-networking.com)



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.