
Item Code: 100-071



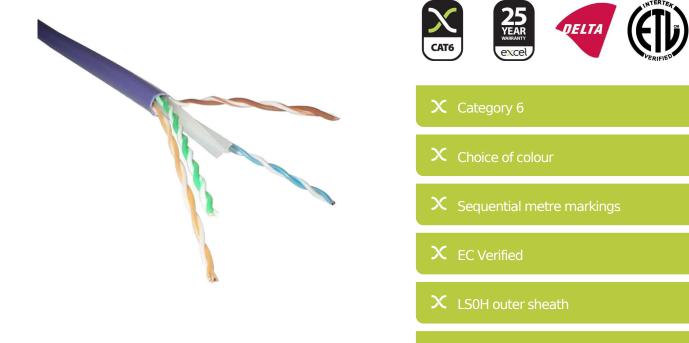

Product Overview

Excel Category 6 Unscreened LSOH cables are manufactured and tested to the TIA/EIA 568-B.2-1, EN50173-1 and ISO/ IEC 11801 Category 6 specifications. Each cable consists of 8 colour coded polyethylene insulated conductors. These are twisted together to form 4 pairs with varying lay lengths. These pairs are then formed around a central X-shaped polyethylene filler, which assists in maintaining and enhancing the cable performance.

Euroclass Dca-s2-d2-a1

The print legend on the cable now includes information regarding the DOP number, Test and Classification of the cable for traceability.

Product Specifications

Feature	Values
Category	6
Overall screening	None
Conductor screening	None
Outer sheath colour	Violet
Reaction-to-fire class according to EN 13501-6	Dca
Smoke development class according to EN 13501-6	s2
Euro class flaming droplets/particles according to EN 13501-6	d2
Euro class acidity according to EN 13501-6	al
AWG-size	23

Item Code: 100-071



Specification core insulation	PE
Core identification	Colour
Outer sheath material	Copolymer
Halogen free (acc. EN 60754-1/2)	Yes
Flame retardant	In accordance with EN 60332-1-2 and EN 50399
Low smoke (acc. BS EN 61034-2)	Yes
Outer diameter approx.	6.2 mm
Installation Temperature Range	060 °C
Operating Temperature Range	-2075 °C
NVP value	69 %
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Conductor surface	Bare


Cable specifications

Features	Values
Dielectric strength	2.5kV for 2s
Maximum Pulling Load	60N/6.1KgF
MBR during installation	8x cable OD
MBR installed	4x cable OD

Item Code: 100-071



Cross-section diagram



Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2009+AMD1:2012 CSV	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2011	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
BS EN 50288-6-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for $1\mathrm{kW}$ pre-mixed flame
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2011	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH

Item Code: 100-071



	measurement) and conductivity
IEC 61034-2:2005+A1:2013	Measurement of smoke density of cables burning under defined conditions – Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
RoHS	Restriction of Hazardous Substances - Compliant

Part Number Table

Part Number	Description
100-071	Excel Category 6 Cable U/UTP Dca LS0H 305m Box - Violet
100-071-1000M	Excel Category 6 Cable U/UTP Dca LS0H 1000m Reel - Violet
100-071-500M	Excel Category 6 Cable U/UTP Dca LS0H 500m Reel - Violet
100-072	Excel Category 6 Cable U/UTP Dca LS0H 305m Box - Green
100-074	Excel Category 6 Cable U/UTP Dca LS0H 305m Box - White
100-074-1000M	Excel Category 6 Cable U/UTP Dca LS0H 1000m Reel - White
100-074-500M	Excel Category 6 Cable U/UTP Dca LS0H White 500m Reel - White
100-075	Excel Category 6 Cable U/UTP Dca LS0H 305m Box - Orange
100-103	Excel Category 6 Dual Cable U/UTP LS0H 500m Reel - White

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.



Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.