

# Excel 4-way Horizontal PDU - 4x UK sockets, UK plug

Item Code: D13-4H-EXL

**excel**  
without compromise.



✕ Comprehensive choice of sockets

✕ Standard 3m PVC power lead with 13 Amp BS 1363 UK plug

✕ Choice of mounting options

✕ Fully shrouded switch

✕ LED indicator to confirm power to the unit

## Product Overview

The Excel range of power distribution units are designed for installation and use within 19" networking cabinets and enclosures. Each unit comprises a high quality aluminium extruded housing into which are loaded up to 12 sockets.

In this particular range each socket is UK style, manufactured in accordance with the BS1363 standard, the 3 metre input lead is terminated with a 13Amp rated 3 pin BS1363 plug top. The sockets are mounted at a 45° angle on the vertical PDUs and a 90° angle on the horizontal PDUs to aid with cable management.

The range of available units includes 19" horizontally mounted, and higher density vertical mounted options, each unit contains a fully shrouded switch to control input power, and a LED indicator to confirm power to the unit.

## Product Specifications

Feature	Values
Mounting dimension	19 inch
Mounting direction	Horizontal
Electrical connection	Connecting cord with plug
Type of electric plug connection	British Standard (BS1363)
Cable length	3 m
Number of UK BS1363 sockets	4
Number of rack units (RU)	2
Width	482.6 mm
Height	62 mm

Item Code: D13-4H-EXL

Depth	45 mm
Supply voltage	250 V
Switchable	Yes
With LED indication	Yes
With fuse	Yes
With mounting bracket	Yes


## Additional specifications

Features	Values
Input cable type	3 core 1.5mm cable
PDU Input cable connector	N/A
Rated Voltage	250 V AC 50/60 Hz
Rated current	13 A
Maximum power	3250 W
Unit control	LED indicator. On/off rocker switch
Insulation Resistance	≥5MΩ
Fire resistance	Flame retardant
Operating temperature	-10°C to +45°C
Relative humidity	0% to 90%
Cable entry (horizontal orientation)	Left
Cable entry (vertical orientation)	Top
Socket angle (horizontal orientation)	90°
Socket angle (vertical orientation)	45°
Master Circuit Breaker	NO
Master Switch	Yes
Housing colour	Silver
Housing material	Aluminum

## Included accessories

Accessories	Quantity
M6 x 4 fixings	x4
user manual	x1
6mm earth cable	x1

## Product drawing

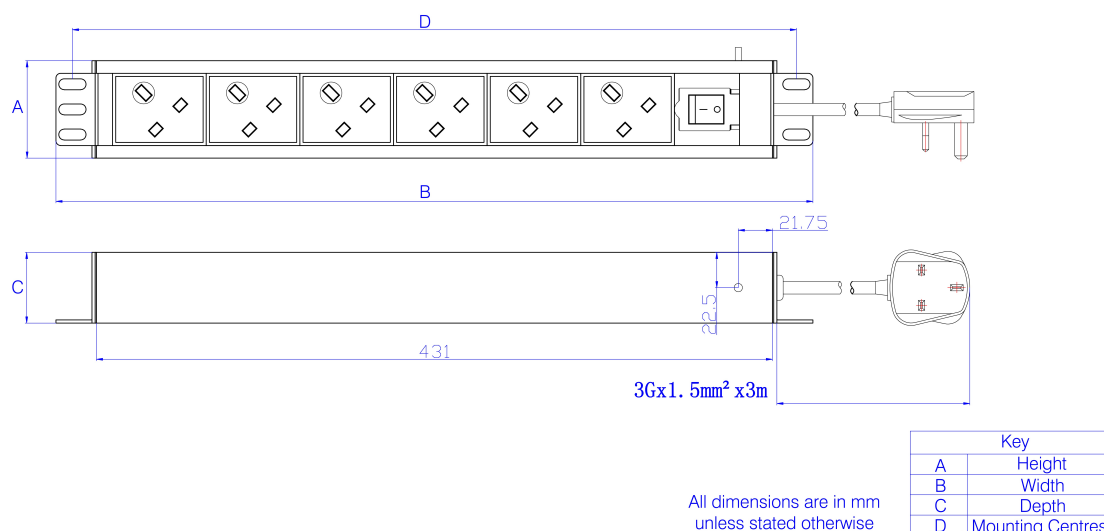

## Standards

Applicable standard	Detail
RoHS	Restriction of Hazardous Substances - Compliant
BS 1363-2:1995	13 A plugs, socket-outlets, adaptors and connection units. Specification for 13 A switched and unswitched socket-outlets

## Part Number Table

Part Number	Description
D13-10-EXL	Excel 10-way Vertical PDU - 10x UK sockets, UK plug
D13-12-EXL	Excel 12-way Vertical PDU - 12x UK sockets, UK plug
D13-4-EXL	Excel 4-way Vertical PDU - 4x UK sockets, UK plug
D13-4H-EXL	Excel 4-way Horizontal PDU - 4x UK sockets, UK plug
D13-5-EXL	Excel 5-way Vertical PDU - 5x UK sockets, UK plug
D13-5H-EXL	Excel 5-way Horizontal PDU - 5x UK sockets, UK plug
D13-6-EXL	Excel 6-way Vertical PDU - 6x UK sockets, UK plug
D13-6H-EXL	Excel 6-way Horizontal PDU - 6x UK sockets, UK plug
D13-7H-EXL	Excel 7-way Horizontal PDU - 7x UK sockets, UK plug
D13-8-EXL	Excel 8-way Vertical PDU - 8x UK sockets, UK plug

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at [sales@excel-networking.com](mailto:sales@excel-networking.com)



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.